



Recording Artists

RØDE[®]
MICROPHONES



Features:

- Large capsule with gold-plated membrane
- Ultra low noise
- Wide dynamic range
- Class A valve circuitry
- Hand-selected and graded twin-triode valve
- Dedicated Power Supply
- High strength welded and heat-treated steel mesh head
- Durable satin nickel finish
- Internal capsule shock mounting
- High level of RF rejection

Accessories included:

- Power Supply
- 30'(10m) Multicore Cable
- M2 Standmount plus 3/8" - 5/8" Thread Adaptor.

Optional Extras:

- SM2 Shockmount



NTK

The NTK is a valve microphone designed exclusively for recording professionals who want what only the best can offer.


The NTK has a large (1") capsule gold plated membrane, with twin triode valves hand graded and selected especially for use in the NTK.

The NTK delivers the wide dynamic range, ultra low noise, and the quality and warmth demanded when choosing a valve microphone.

NTK, when professional performance counts.

Specifications:

Capsule:	Externally polarised 1" pressure-gradient condenser
Active Electronics:	Unity-gain closed-loop impedance converter; vacuum-tube input with bipolar buffering
Pickup Pattern:	Cardioid
Frequency Response:	20Hz - 20kHz (+/-6dB)
Output Impedance:	200 ohms (100 ohms per leg)
Sensitivity:	-38dB re 1V/Pa (12mV @ 94dB SPL) +/-1dB
Equivalent Noise:	12dB SPL (A-weighted per IEC268-15) +/-2dB
Maximum Output:	> +29dBu (@ 1kHz, 5% THD into 1k(load)
Dynamic Range:	> 147dB (A-weighted, per IEC268-15)
Maximum SPL:	> 158dB SPL (@ 1kHz, 5% THD into 1k(load)
Signal/Noise Ratio:	> 82dB (A-weighted, per IEC268-15)
External power supply:	100-120V / 200-240V AC (user selectable) 50Hz / 60Hz, 25VA maximum
Packed Weight:	4.53 kg (Mic only 760 gm)

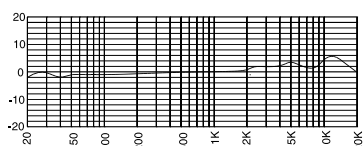

RØDE

MICROPHONES

PROUDLY MADE IN AUSTRALIA

