

SC 440 USB

Large diaphragm studio condenser microphone






- ✓ Studio condenser microphone with USB port for direct operation on the computer
- ✓ Compatibility:
Windows 2000 to Windows 10 & Mac OSX
(also compatible to Garageband and Logic)
- ✓ Incl. PVC case, shockmount and USB cable

EN

Caution!

- ▶ Never remove the screen holding the capsule, as this may damage the microphone!
- ▶ Never drop the mic, as this may cause severe damage!
- ▶ When the microphone is not in use, take it out of its clamp and put it in its case. Clean with damp cloth only.

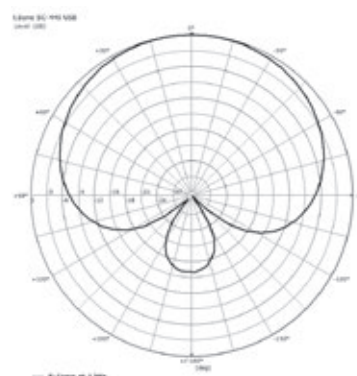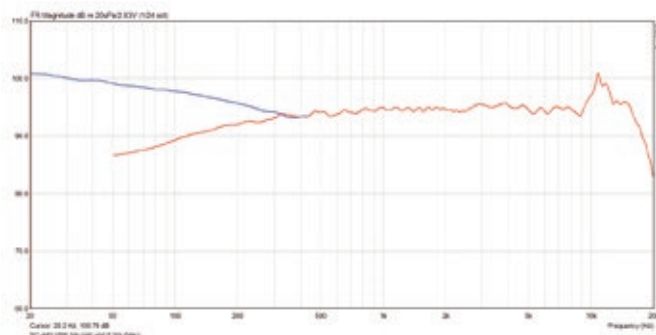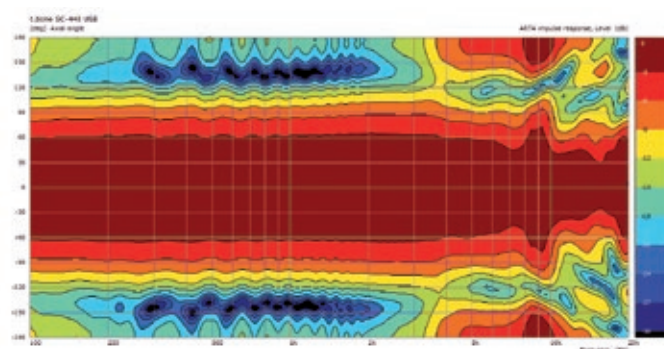

Polar pattern @ 1 kHz

Connection / Supply	USB
Transducer concept	Condenser
Directivity	Cardioid
Field sensitivity [dB (0 dB = 1 V/Pa@1 kHz)]	-32 ± 2
Equivalent noise level [dB(A)]	11
Signal-to-noise ratio [dB]	83
Maximum SPL [dB SPL @ 1% THD]	134
Frequency response [Hz 0.1 m -10 dB]	30 - 18,000
Weight	378 g (mic), 281 g (shockmount & cable)

For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose of your old device with your normal household waste. Dispose of this product through an approved waste disposal firm or through your local waste facility. Comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.