

### Quick Start Guide

This quick start guide contains important information on the safe operation of the product. Read and follow the safety advices and instructions given. Retain the quick start guide for future reference. If you pass the product on to others please include this quick start guide.

### Safety instructions

#### Intended use

This device is designed as a PA system. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

#### Danger for children



Ensure that plastic bags, packaging, etc. are disposed of properly and are not within reach of babies and young children. Choking hazard! Ensure that children do not detach any small parts from the product. They could swallow the pieces and choke! Never let children unattended use electrical devices.

#### Possible hearing damage

The device can produce volume levels that may cause temporary or permanent hearing impairment. Over an extended period of time, even levels that seem to be uncritical can cause hearing damage. Decrease the volume level immediately if you experience ringing in your ears or hearing impairment. If this is not possible, keep a greater distance or use sufficient ear protectors.

#### Where to use the product

Never use the product

- in conditions of extreme temperature or humidity
- in extremely dusty or dirty areas
- at locations where the unit can become wet

#### General handling

- To prevent damage, never use force when handling the product.
- Never immerse the product in water. Just wipe it with a clean dry cloth. Do not use liquid cleaners such as benzene, thinners or flammable cleaning agents.

### Features




- 2-way speaker system
- 4-pin terminal connection
- M12 cable gland
- elegant, slim design
- ball proof
- flat frequency response
- internally patchable
- incl. mounting brackets (180°, horizontal tiltable) and mounting material
- optional suitable wall holders (item no. 209275), not included



### Technical specifications

	MTS3C-100V (item no. 212018)
Configuration	4 × 5 cm speaker, 1 × tweeter
Input connections	terminal connections
Frequency range	250 Hz -19 kHz, -10dB
Load capacity	20 W
Sensitivity (1 W/1 m)	94 dB
Leistungsabgriffe	20 W/10 W/5 W
Dispersion angle @ 1 kHz H/V	160°/80°
Sound pressure level (SPL)	107 dB
Front-to-back ratio	> 20 dB (ab 300 Hz)
Degree of protection	IP55
Colour	white, RAL 9010
Dimensions (W × H × D)	67 mm × 392 mm × 64 mm
Weight	1.9 kg

	MTS4C-100V (item no. 142529)
Configuration	8 × 5 cm speaker, 1 × tweeter
Input connections	terminal connections
Frequency range	200 Hz -19 kHz, -10dB
Load capacity	30 W
Sensitivity (1 W/1 m)	96 dB
Leistungsabgriffe	30 W/15 W/7,5 W
Dispersion angle @ 1 kHz H/V	160°/60°
Sound pressure level (SPL)	111 dB
Front-to-back ratio	> 20 dB (ab 300 Hz)
Degree of protection	IP55
Colour	white, RAL 9010
Dimensions (W × H × D)	67 mm × 607 mm × 64 mm
Weight	2.5 kg

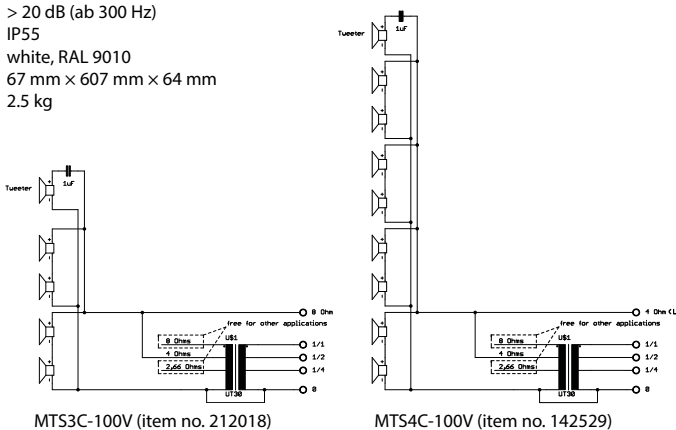

MTS3C-100V (item no. 212018)

MTS4C-100V (item no. 142529)



For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose of your old device with your normal household waste. Dispose of this product through an approved waste disposal firm or through your local waste facility. Comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.