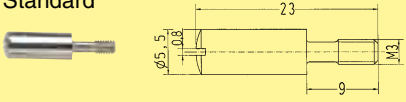
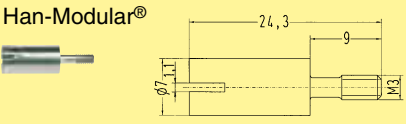

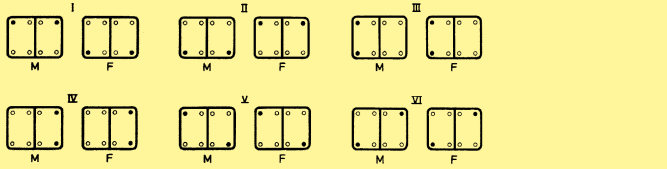
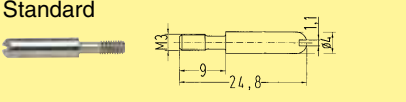
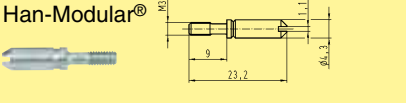
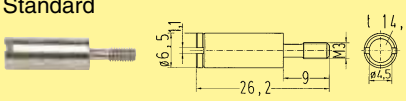
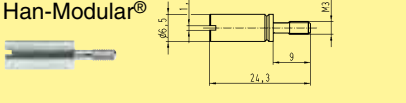
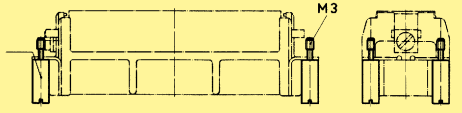
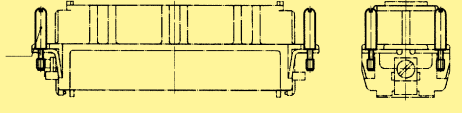
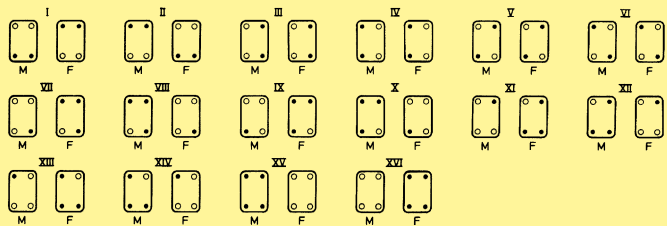
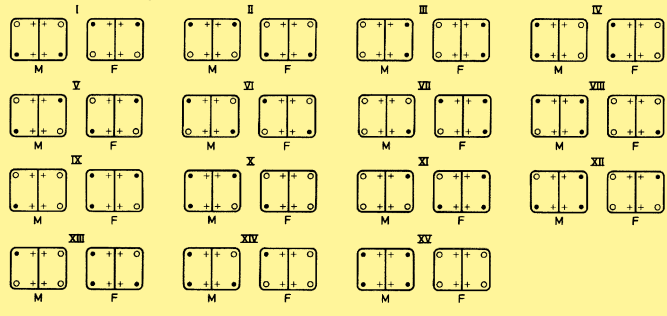







Identification	Part No.	Drawing	Dimensions in mm
Coding system with code pins Standard  Han-Modular® 	09 30 000 9901¹⁾ 09 14 000 9901¹⁾	for hoods/housings with one insert/one frame  for hoods/housings with two inserts/two frames  ● Code pins ○ Normal mounting screw M – Male connector F – Female connector	
Coding system with guide pins and bushes Guide pin Standard  Han-Modular®  Bush Standard  Han-Modular® 	09 33 000 9908¹⁾ 09 14 000 9908¹⁾ 09 33 000 9909¹⁾ 09 14 000 9909¹⁾	This system is used to guard against angled coupling and decoupling of the connector. The maximum permitted angle according to DIN EN 175301-801 is $\pm 5^\circ$ (longitudinally). 09 33 000 9909  09 33 000 9908  for hoods/housings with one insert/one frame  for hoods/housings with two inserts/two frames  ● Guide pin ○ Bush + Normal mounting screw M – Male connector F – Female connector	
Coding Pin for Han E®, Han® EE Han® Q 5/0, Han® Q 8/0 	09 33 000 9954	 <p>Use of the coding pin prevents incorrect mating to other connectors of the same type.</p> <p>The male pin should be omitted from the opposing cavity in the male insert.</p> 	
Coding system with loss of contact for Han D®, Han DD® 	09 33 000 9915	<p>Use of the coding pin prevents incorrect mating to other connectors of the same type.</p> <p>The male pin should be omitted from the opposing cavity in the male insert.</p> 	

Accessories

40
12

¹⁾ Order 4 pieces for one connector

Stock items in bold type