



the box pro

achat 112 SUB A

ACTIVE LOW FREQUENCY SPEAKER

User Manual

Safety Precautions

Flying and installation of this speaker cabinet must be carried out by suitably qualified personnel following the approved safety standards.

Do not attempt to clean the plastic enclosure with solvents or petrochemical based cleaners.

Do not place objects which are sources of heat on the speaker cabinet such as lighting equipment or smoke machines.

Do not expose the speaker cabinet to direct precipitation or stand in water. Liquid getting into the box will risk a short circuit and will be hazardous.

Do not stack the speaker cabinet in a manner that could cause injury should a cabinet become dislodged.

Attention


Before connecting or operating your new THOMANN MUSIKHAUS speaker, please study the accompanying instruction manual paying particular attention to the operating precautions and wiring procedure.

THOMANN MUSIKHAUS will not assume responsibility for incorrect installation or operation of this product.

Features:

- 12" chassis , 350 W.
- Built-in Amplifier with XLR/ jack combo input.
- Frequency response 45-250 Hz, adjustable high cut 80-250 Hz.
- Cabinet plywood with M20 pole mount socket on top.
- Shallow profile, fits under a 40cm stage platform.
- Black textured paint.
- Rigid steel front grille.
- NL4 speakon connectors.

Amplification Module

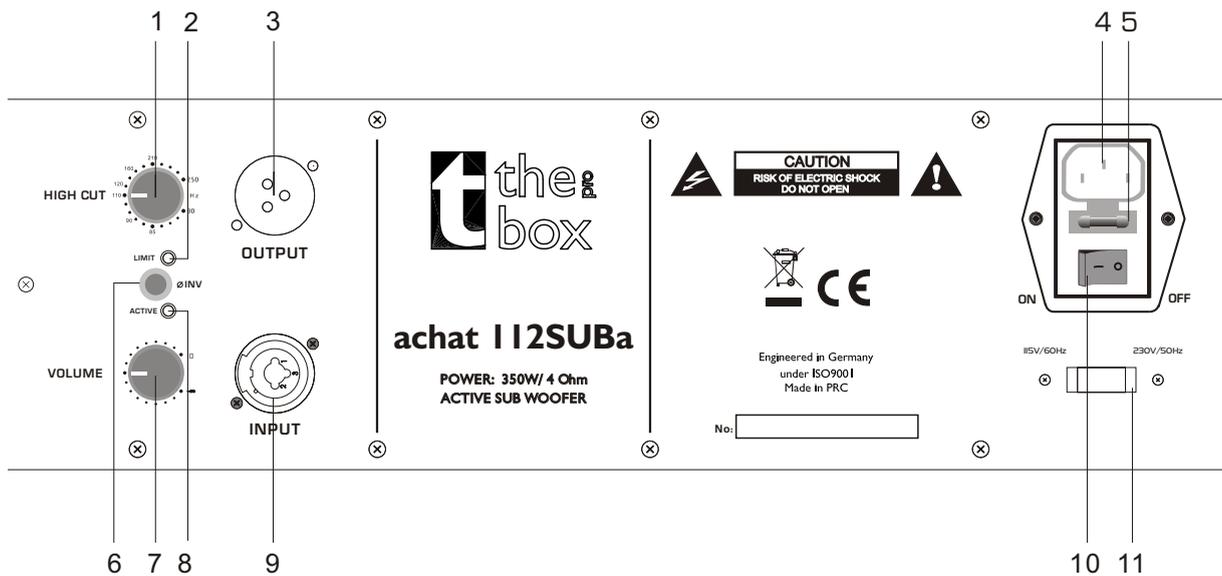

1.High cut.(80Hz~250Hz adjustable)

2.Limit indicator.

3.Line output.

4.Protection fuse.

5.Power supply input. Make sure that the voltage selector is set for your country's correct voltage.

6. Phase inverting switch.

7. Volume control.

8. Active indicator.

9. Line input.

10.Power ON/OFF switch.

11.AC 110V/220V voltage input selector.

Specifications

System:	Active low frequency speaker
Cabinet material:	Plywood
Cabinet Colors:	Black
Drive Quantity:	1x12" (Bass)
Frequency Response(-3dB):	40Hz-250Hz
Max Sound Level:	124dB/1M
Output Power:	350W
Distortion:	0.02%(Line)
Load Impedance:	4 Ohm(Bass)
Input Impedance:	20 KOhm
Connectors:	XLR, K3P, J3P
Power Supply:	115V/230V, 50/60Hz
Dimensions(WxDxH mm/pcs):	450x456x370mm
Packing Dimensions(WxDxH mm/pcs)	560x560x485mm
Net Weight(Kg/pcs):	22.0kg
Gross Weight(Kg/pcs):	24.5kg

* In the interests of product development, THOMANN MUSIKHAUS reserves the right to change and improve all specifications quoted.