

WAL-L Tour Charge 4in1

Read and follow the safety instructions and all other instructions. Keep the manual for future reference. If you pass the product to another person, please pass the user manual with it.

Safety instructions

Intended use

This device is designed to transport and charge 4 LED spotlights Ignition WAL-L412 BP RGBW (item no. 461723). Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.

Power supply

Before connecting the device, ensure that the input voltage (AC outlet) matches the voltage rating of the device and that the AC outlet is protected by a residual current circuit breaker. Failure to do so could result in damage to the device and possibly the user.

Unplug the device before electrical storms occur and when it is unused for long periods of time to reduce the risk of electric shock or fire.

Risk of fire

Never cover the device, fan intake or vents. Keep the lid open during charging.

Danger for children




Ensure that plastic bags, packaging, etc. are properly disposed of and are not in the reach of babies and young children. Choking hazard! Ensure that children do not detach any small parts from the product. They could swallow small parts and choke!

Never let children play unattended with the electrical devices.

Features

- Tour Case with charging electronics
- Parallel charging of four Ignition WAL-L412 BP RGBW (item no. 461723)
- 8 × ball corner
- 4 × fold-down handle
- 2 × butterfly catch
- 4 × wheel (two with brakes)
- Housing material: black foil coated birch plywood (thickness: 7 mm)
- Inlay adapted to the spotlights

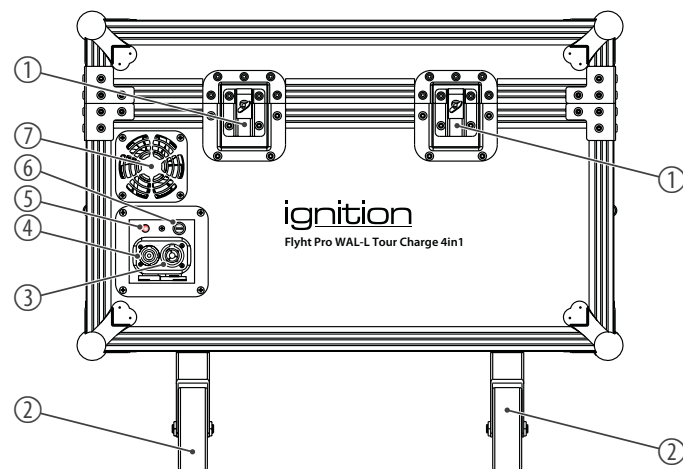

Technical specifications

- Power supply: lockable input/output connections (Power Twist TR1), with caps
- Power consumption: 250 W
- Degree of protection: IP20
- Charging time: 4.5 hours
- Supply voltage: 100 – 240 V ~, 50/60 Hz
- Fan cooling
- Dimensions (incl. wheels) (W × H × D): 653 mm × 552 mm × 661 mm
- Weight: without spotlights: 33 kg, incl. spotlights: 54 kg
- Environmental conditions:
Temperature range: –10 ... +45 °C
Relative humidity: 50 %, non-condensing

Connections and operating elements

- ① Butterfly catch
- ② Wheel
- ③ Lockable output socket (Power Twist TR1)
- ④ Lockable input socket (Power Twist TR1)
- ⑤ Charging indicator LED (more charging indicator LEDs for the spotlights are inside the case)
- ⑥ Fuse
- ⑦ Ventilation grille (another ventilation grille is on the backside of the Flyht Case)



For the packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling. Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.



This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose with your normal household waste. Dispose of this device through an approved waste disposal firm or through your local waste facility. When discarding the device, comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.