

# VIDEOMIC

Directional Video Condenser Microphone

**RØDE**<sup>®</sup>  
MICROPHONES

## Features


- Studio recording quality
- Condenser microphone
- 9V battery powered
- Integrated shock mounting
- Two step High Pass Filter (Flat/80Hz)
- Three step PAD (0, =10, -20dB)
- Rugged reinforced ABS construction
- Windshield included
- 3.5mm mini-jack output
- Integrated cold-shoe mount, 1/4" and 3/8" thread
- Designed in Australia
- Full 10 year warranty\*




## Specifications

Acoustic Principle	Line Gradient	Directional Pattern	Super-Cardioid
Frequency Range	40Hz ~ 20,000Hz (selectable HPF@80Hz)	Sensitivity	-38dB ±2dB re 1V/Pa @ 1kHz
Nominal Impedance	200Ω - phantom power	Equivalent Noise	20dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1kΩ)	Dynamic Range	114dB (per IEC651)
Maximum SPL	134dB (@ 1kHz, 1% THD into 1kΩ load)	Signal/Noise	74dB SPL (A - weighted per IEC651)
Power Req.	9V alkaline battery (Current 5mA)	Dimensions	250mmL x 102mmH x 65mmD
Output Connection	3.5mm mini-jack	Net Weight	176g

## Frequency Response

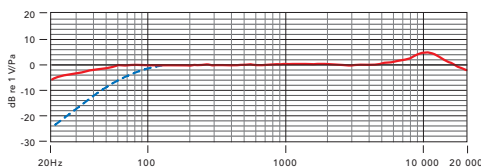

## Polar Pattern



## Included Accessories

- WSVM windshield

[www.rodemic.com](http://www.rodemic.com)

\*After online registration